

GAS SEPARATOR



Application:

Franklin Electric's Gas Separator is installed between the pump and motor to separate methane and other entrained gas from water.

Features:

- NEMA 4" connection or available with custom connection
- AISI 420 stainless steel one-piece shaft
- Tungsten carbide inner and outer bearings
- Long separating chamber for efficient stability
- Intermediate bearing for enhanced stability
- Intermediate flow straightener for maximum agitation
- One-piece cast stainless induction screw
- Heavy construction to support cast iron pumps
- Precision machined inlet and discharge ends for minimum flow restriction




Model Availability

Gas Separator				
Order Number	Dimensions		Shipping Weight	
	IN	MM	LBS	KG
226039101	5 x 5 x 30	127 x 127 x 762	25	11.33

Materials of Construction

Component	Material
Motor Adaptor	420 stainless steel
Shaft	420 stainless steel
Bearings	Tungsten carbide
Intermediate Bearing	304 stainless steel
Induction Screw	304 stainless steel
Inner Liners	304 stainless steel
Discharge End	420 stainless steel

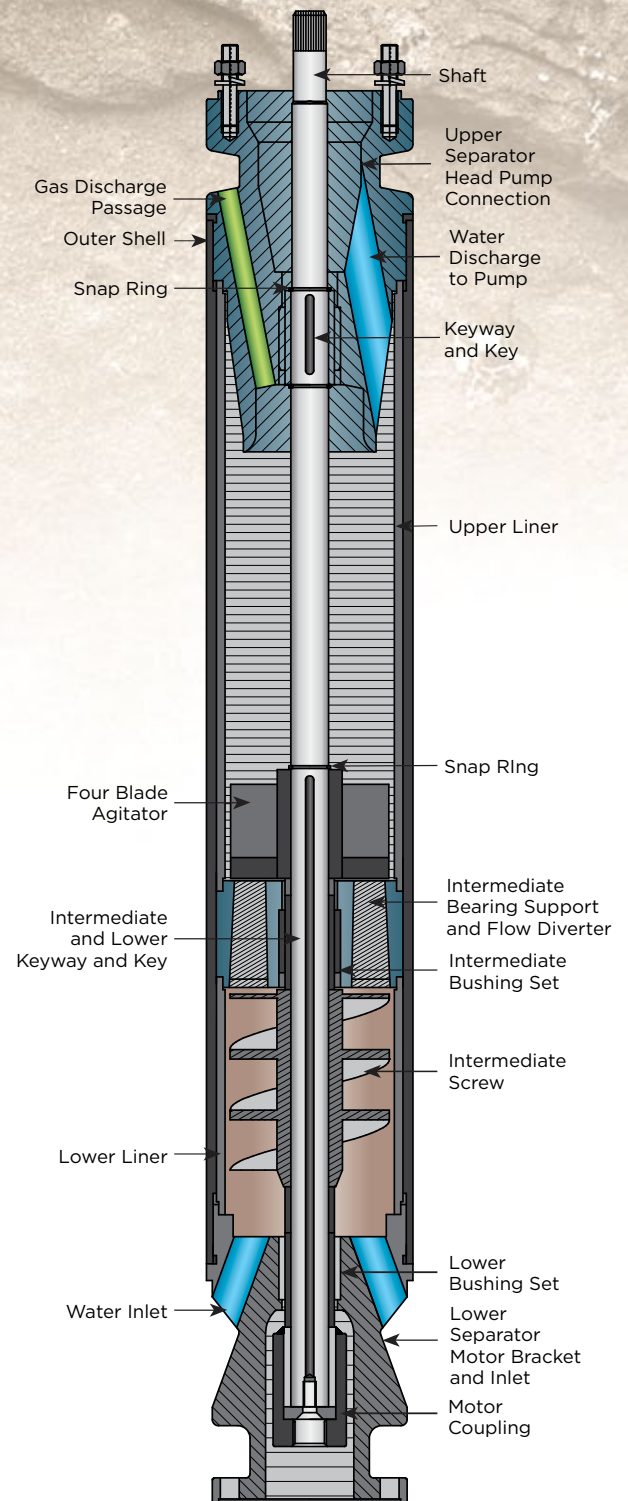

Franklin Electric

9255 Coverdale Road, Fort Wayne, IN 46809 • Tel: 260.824.2900 Fax: 260.824.2909 • www.franklin-energy.com

AL-0009 10-13