
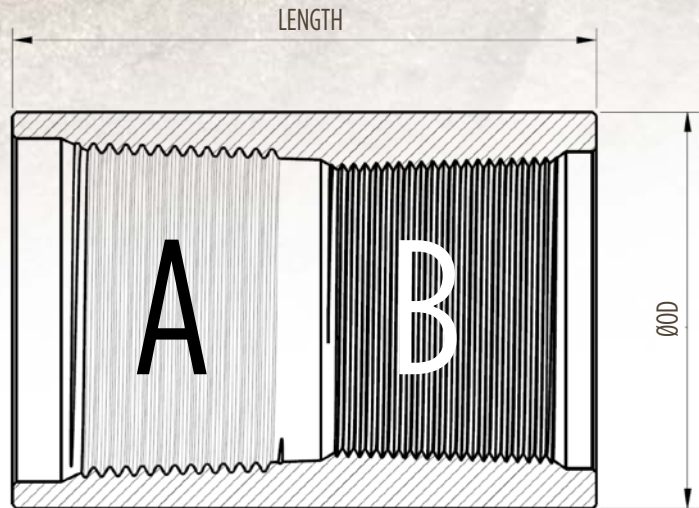


ARTIFICIAL LIFT SYSTEMS

FRANKLIN ELECTRIC'S ARTIFICIAL LIFT COUPLINGS

Franklin Electric offers a range of high quality 304 Stainless Steel (Condition A) couplings to meet your Artificial Lift needs. These couplings allow for the connection between 2" NPT threads and the designated tubing size. Tolerances are inspected in-house, before shipping, to ensure the highest standard of quality.

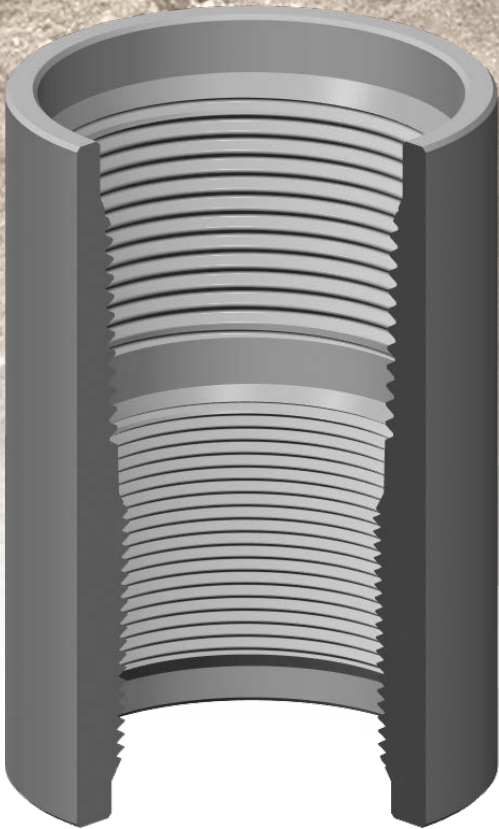

OD	Length	Material	Pressure Rating	A	B	Part Number
2.875"	4.25"	304 SS Condition A	2500 psi	API 1.90" - 10RD NUE*	API 2-11.5V LP*** (NPT)	104235114
2.875"	4.25"	304 SS Condition A	2500 psi	API 2-3/8" - 10RD NUE	API 2-11.5V LP (NPT)	104235115
3.500"	4.50"	304 SS Condition A	2500 psi	API 2-7/8" - 10RD NUE	API 2-11.5V LP (NPT)	104235116
2.875"	3.75"	304 SS Condition A	2500 psi	API 1.31" - 10RD EUE**	API 2-11.5V LP (NPT)	104235102
2.875"	4.25"	304 SS Condition A	2500 psi	API 1.90" - 10RD EUE	API 2-11.5V LP (NPT)	104235104
3.063"	4.50"	304 SS Condition A	2500 psi	API 2-3/8" - 8RD EUE	API 2-11.5V LP (NPT)	104235105

*NUE = Non Upset End

**EUE = External Upset End

***LP = Line Pipe



Franklin Electric

www.franklin-energy.com

AL-0019 10-15